


TAPIFLEX STAIRS

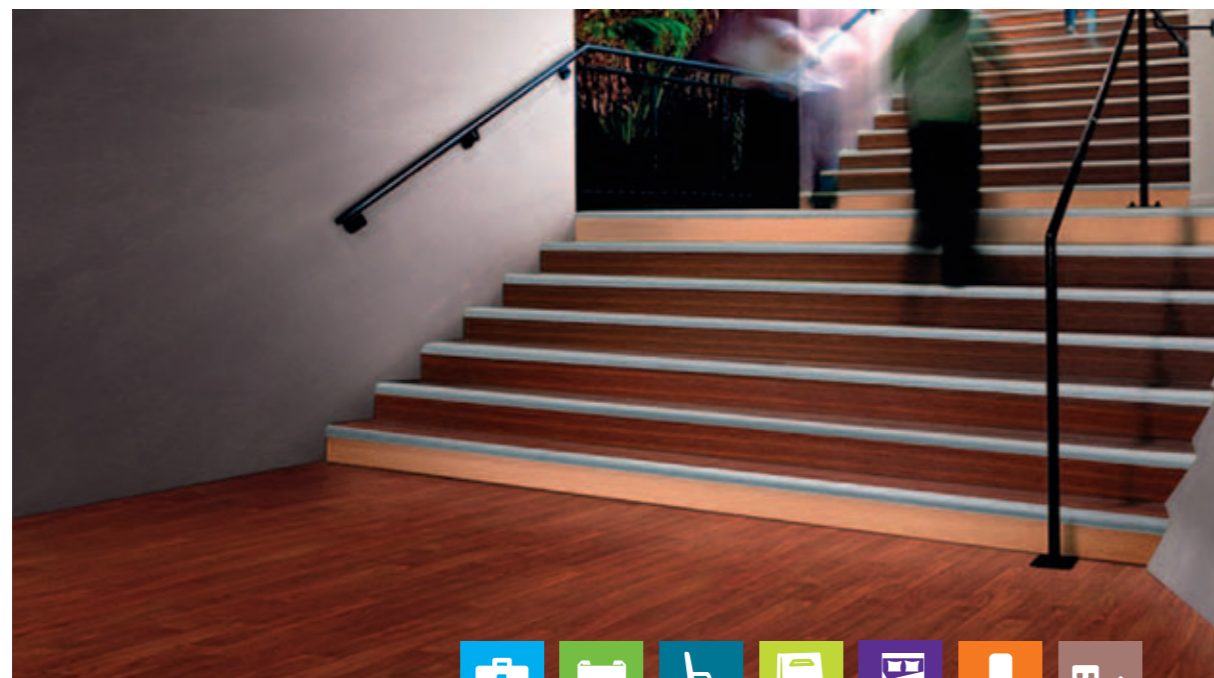

Vinyl stair solutions to offer safety and noise reduction in all buildings

SENSORIAL BENEFITS

- Wide range of stair designs ready to lay, with wood and concrete contrastful effects
- Matching designs in Tapiflex Evolution, Excellence and Essential ranges
- Wide range of dedicated accessories


FUNCTIONAL BENEFITS

- Built-in stair noses to create contrast and offer safety to users
- Highly resistant and easy to maintain thanks to TopClean XP surface treatment
- Combined accessibility kit for visually impaired people, in accordance with regulatory requirements (warning tile and tactile strip)

ENVIRONMENTAL BENEFITS

- Unrivalled indoor air quality
- Improved carbon footprint

- 1 TopClean XP – reinforced treatment:**
very high resistance to scratches and easy maintenance
- 2 Pure transparent vinyl wear layer:**
resistance to abrasion
- 3 Contrasted decors:**
visual guidance and safety
- 4 Glass fibre non-woven reinforcement:**
superior dimensional stability
- 5 Solid homogeneous calendared sheet made of recycled vinyl:**
resistance to indentation and tearing
- 6 High density closed-cell foam backing:**
sound reduction and comfort underfoot

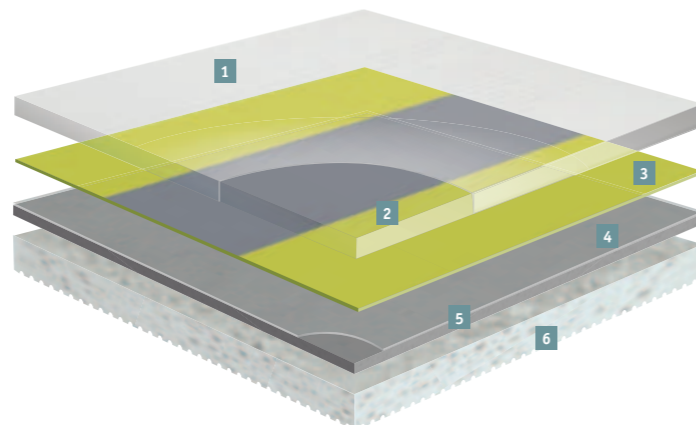

TAPIFLEX STAIRS

TECHNICAL DATA	STANDARDS	Tapiflex Stairs	
Classification			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	
	UPEC Classification NF UPEC certificate number (Ref NF189)	U4 P3 E2 C2 18dB 305-032.1	
Polyurethane reinforcement (PUR)	—	TopClean XP	
Characteristics			
Total thickness	ISO 24346 (EN 428)	3.50mm	
Wear layer thickness	ISO 24340 (EN 429)	1.00mm	
Total weight	ISO 23997 (EN 430)	3 670g/m ²	
Technical performances			
Residual indentation	Average measured value	≤0.20mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _s s1 glued over any A2 _s or A1 _s substrate (concrete) C _s s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	
Dimensional stability Curl resultant to heat	ISO 23999 (EN 434)	≤ 0.10% ≤ 8mm	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	—	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Abrasion group	EN 660-2	Group T: ≤ 2mm ³	
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete R1> 10 ⁹ ohms	
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 18dB	
Form of delivery	ISO 24341 (EN 426)	Rolls: 231m x 1.02m	
Colours	—	17	

TECHNICAL DATA	STANDARDS	Warning Tile	Tactile Strip
Classification			
Classification	NF P 98 351	Compliant	Compliant
Characteristics			
Thickness		Base: 2mm (with chamfered edge) Stud: 5mm (with wear indicator)	1.6 lower part / 3.2 upper part
Weight		1.5kg / tile	16.8kg / roll
Form of delivery		Tiles: 80 x 42cm	Rolls: 15.241m x 30.48cm
Colours		7	5

The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.



Download the product offer