


TAPIFLEX & ACCZENT EVOLUTION

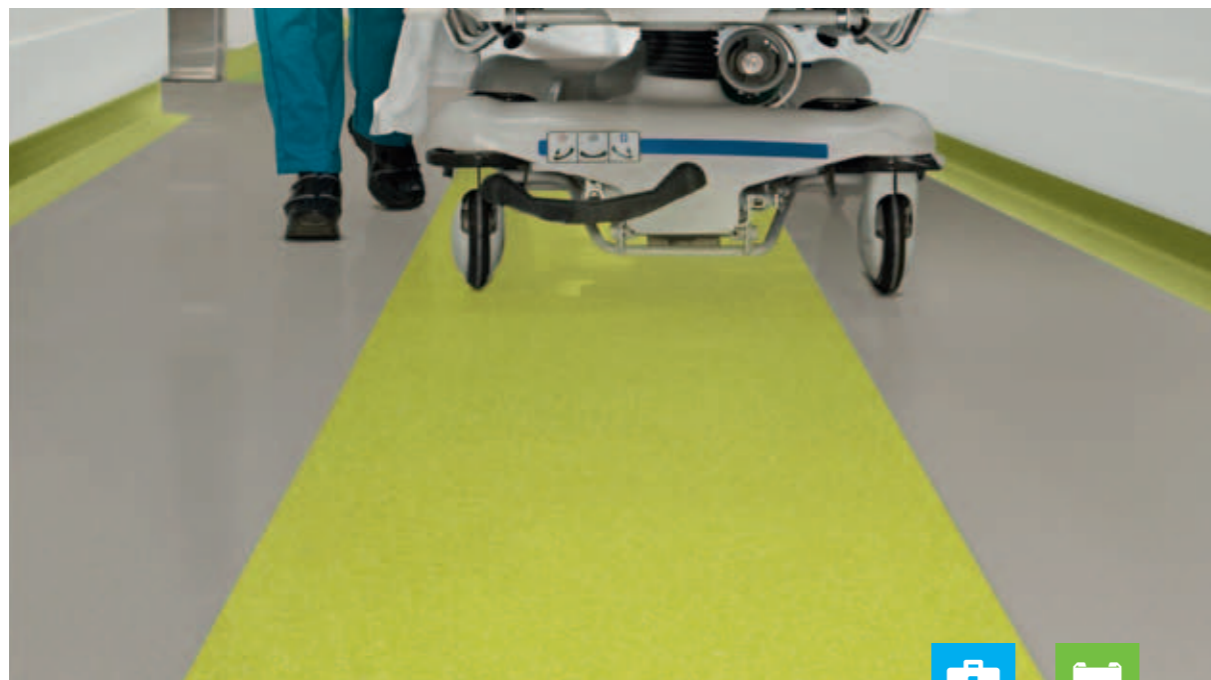

The ergonomical & technical solution for very heavy traffic areas in healthcare and education

SENSORIAL BENEFITS



- Mix & match colours and designs
- All designs available in Compact and Acoustic
- Fully integrated solution to be associated with ProtectWALL (see p. 272), Wetroom (see p. 238) & a full set of accessories including multicolour welding rods

FUNCTIONAL BENEFITS

- Great acoustics with less stress and strain
- Save money and time with easy maintenance
- No wax no polish for life with Top Clean XP!

ENVIRONMENTAL BENEFITS

- Unrivalled indoor air quality
- Improved carbon footprint

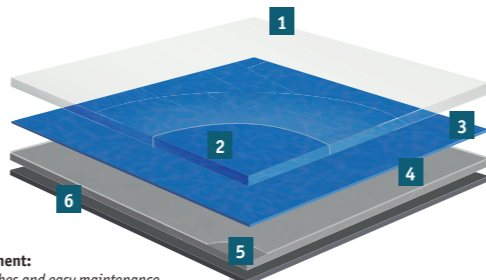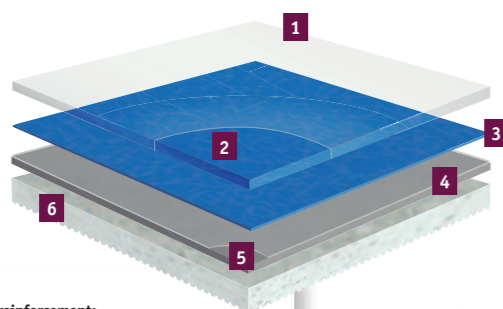

- 1 TopClean XP PUR reinforcement:**
very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:**
resistance to abrasion
- 3 High definition print:**
for perfect designs
- 4 Glass fibre non-woven reinforcement:**
superior dimensional stability
- 5 Solid homogeneous calendared sheet made of recycled vinyl:**
resistance to indentation and tearing
- 6 High density closed-cell foam backing:**
sound reduction and comfort underfoot

- 1 TopClean XP PUR reinforcement:**
very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:**
resistance to abrasion
- 3 High definition print:**
for perfect designs
- 4 Glass fibre non-woven reinforcement:**
superior dimensional stability (< 0.10%)
- 5 Solid homogeneous calendared sheet made of recycled vinyl:**
resistance to indentation and tearing
- 6 PVC Backing**

ACOUSTIC OPTION TAPIFLEX EVOLUTION

COMPACT OPTION ACCZENT EVOLUTION

ACOUSTIC OPTION TAPIFLEX EVOLUTION

| TECHNICAL DATA | STANDARDS | Salt & Pepper | Sand | Spice & Candy, Uni | Vision Spaghetti XXL, Spaghetti, Havane, Pastille, Draft |
|--|---|--|---|---|--|
| Classification | Heterogeneous Vinyl on foam | | | | |
| Classification | EN 651 ISO 10874 (EN 685) commercial | Class: 34 | | | |
| UPEC Classification | UPEC Classification Impact sound reduction EN ISO 717/2 Acoustic improvement NF S31-074 NF UPEC.A+ certificate (NF 189) | U4P3E2/3C2 17dB Ln,e,w <65dB Class A 305-099.1 | U4P3E2/3C2 17dB Ln,e,w <65dB Class A 305-101.1 | U4P3E2/3C2 17dB Ln,e,w <65dB Class A 305-093.1 | U4P3E2/3C2 17dB Ln,e,w <65dB Class A 305-095.1 |
| Characteristics | | | | | |
| Total thickness | ISO 24346 (EN 428) | 3.35mm | 3.20mm | 3.05mm | |
| Wear layer thickness | ISO 24340 (EN430) | 1mm | 0.9mm | 0.7mm | |
| Total weight | ISO 23997 (EN 430) | 3 570g/m ² | 3 440g/m ² | 3 210g/m ² | |
| PU treatment | - | TopClean XP | | | |
| Abrasion group | EN 660-2 | Group T: ≤ 2mm ³ | | | |
| Technical performances | | | | | |
| Residual indentation | Average measured value ISO 24343-1 (EN 433) requirement | 0.08mm ≤ 0.20mm | | | |
| Reaction to fire | EN 13501-1 | B _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate | | | |
| Slip resistance | DIN 51130 / EN 13893 | R9 / μ ≥ 0.30 | | | |
| Dimensional stability | ISO 23999 (EN 434) | Length + width < 0.10% | | | |
| Furniture leg | EN 424 | No damage | | | |
| Castor wheel test | ISO 4918 (EN 425) | No damage | | | |
| Curl resultant to heat | ISO 23999 (EN 434) | ≤ 8mm | | | |
| Electrostatic properties | EN 1815 / EN 1081 | < 2kV on concrete / R1 > 10 ⁹ Ω | | | |
| Chemical resistance | ISO 26987 (EN 423) | High resistance | | | |
| Hygiene | - | Does not contribute to infection spreading | | | |
| Thermal resistance Underfloor heating | EN ISO 10456 | 0.04m ² K/W Suitable | | | |
| Form of delivery | EN 24341 (EN 426) | Rolls: 23lm x 2m | | | |
| Colours | aer | 12 | 9 | 22 | 23 |

COMPACT OPTION ACCZENT EVOLUTION

| TECHNICAL DATA | STANDARDS | Salt & Pepper | Sand | Spice & Candy, Uni | Vision Spaghetti XXL, Spaghetti, Havane, Pastille, Draft |
|--|--|--|-------------------------|-------------------------|--|
| Classification | Compact Heterogeneous Vinyl | | | | |
| Classification | ISO 10582 (EN 649) ISO 10874 (EN 685) commercial industrial | Classes: 34 43 | | | |
| UPEC Classification | UPEC Classification NF UPEC.A+ certificate (NF 189) | U4P3E2/3C2 305-097.1 | U4P3E2/3C2 305-072-1 | U4P3E2/3C2 305-074-1 | U4P3E2/3C2 305-072-1 |
| Characteristics | | | | | |
| Total thickness | ISO 24346 (EN 428) | 2.10mm | 2.00mm | | |
| Wear layer thickness | ISO 24340 (EN430) | 1mm | 0.9mm | | |
| Total weight | ISO 23997 (EN 430) | 3 100g/m ² | 2 990g/m ² | | |
| PU treatment | - | TopClean XP | | | |
| Abrasion group | EN 660-2 | Group T: ≤ 2mm ³ | | | |
| Technical performances | | | | | |
| Residual indentation | ISO 24343-1 (EN 433) ISO 24343-1 (EN 433) requirement | 0.05mm ≤ 0.10mm | | | |
| Reaction to fire | EN 13501-1 | B _n s1 glued over any A2 _n or A1 _n substrate (concrete) B _n s1 glued over any derivative wood substrate | | | |
| Slip resistance | DIN 51130 / EN 13893 | R9 / μ ≥ 0.30 | | | |
| Dimensional stability | ISO 23999 (EN 434) | Length + width < 0.10% | | | |
| Furniture leg | EN 424 | No damage | | | |
| Castor wheel test | ISO 4918 (EN 425) | No damage | | | |
| Curl resultant to heat | ISO 23999 (EN 434) | ≤ 8mm | | | |
| Electrostatic properties | EN 1815 / EN 1081 | < 2kV on concrete / R1 > 10 ⁹ Ω | | | |
| Chemical resistance | ISO 26987 (EN 423) | High resistance | | | |
| Hygiene | - | Does not contribute to infection spreading | | | |
| Thermal resistance Underfloor heating | EN ISO 10456 | 0.02 m ² K/W Suitable | | | |
| Form of delivery | EN 24341 (EN 426) | Rolls: 23lm x 2m | | | |
| Colours | aer | 12 | 9 | 22 | 23 |

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.