


LINOLEUM xf²

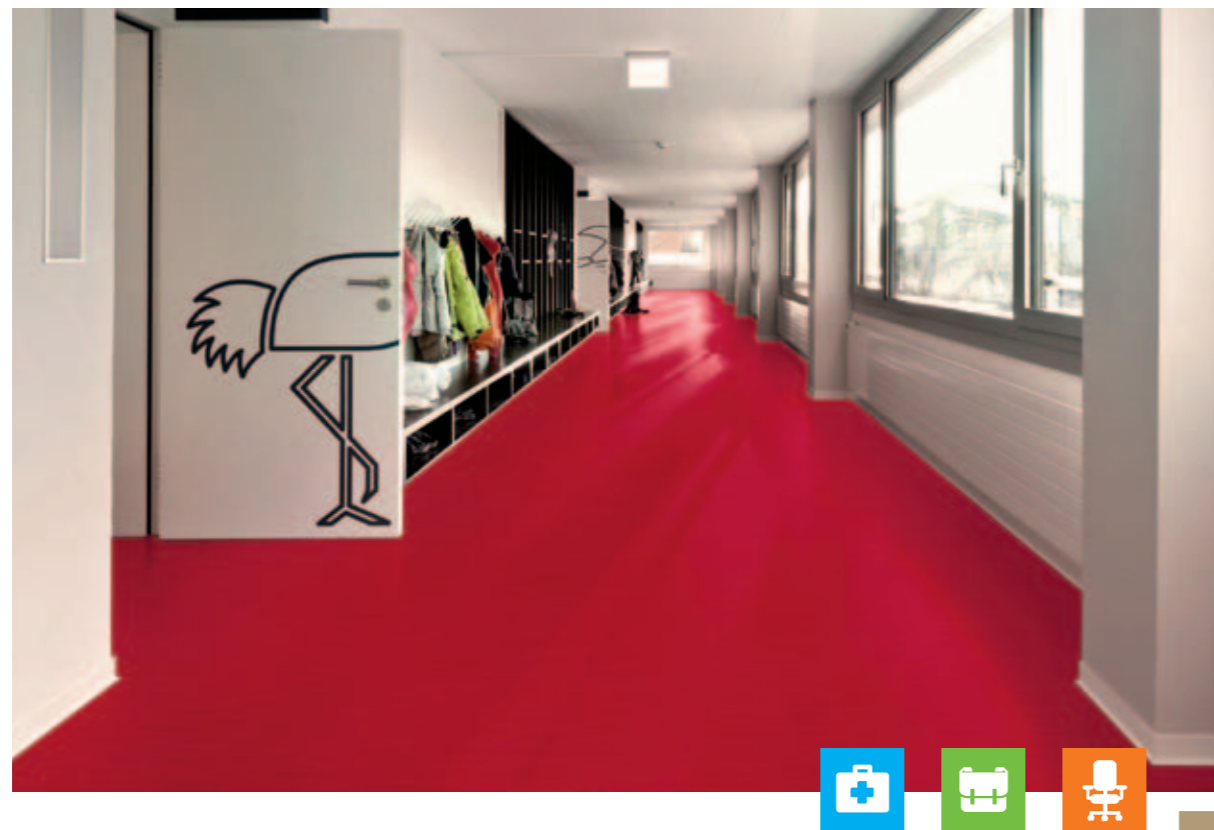

Colourful linoleum collection with the new xf² surface treatment, to meet the ambitions of any architectural project in Education, Healthcare and Offices

SENSORIAL BENEFITS


- Matt appearance for a natural look
- Modern and amazing colours and designs easy to mix & match
- All 112 designs available in Compact and Acoustic
- Matching skirting, corners, wall bases and welding rods

FUNCTIONAL BENEFITS

- Save time and money on maintenance with the new xf² surface treatment: no polish, no stripping and polymer waxing over the lifetime of the product!
- Naturally bactericidal
- Tailored solutions for specific needs: Sicuro xf² R10, Veneto xf² B_{fl}** version and Linoleum xf² Static Dissipative (see under the section "Static Control")


ENVIRONMENTAL BENEFITS

- Natural and recyclable floor, made of natural and renewable ingredients
- First cradle to cradle certified
- Sustainable and natural
- Good indoor air quality
- Simplified maintenance for a better carbon footprint

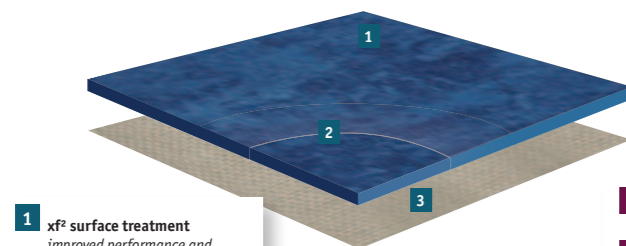

- 1 **xf² surface treatment**
improved performance and resistance to abrasion
- 2 **Pure linoleum**
stable design throughout product lifetime
- 3 **Jute backing**
natural, 100% bio-degradable

xf² COMPACT

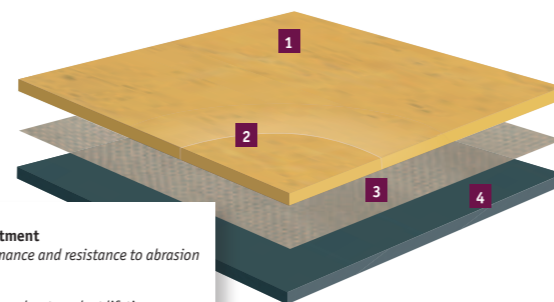

- 1 **xf² surface treatment**
improved performance and resistance to abrasion
- 2 **Pure linoleum**
stable design throughout product lifetime
- 3 **Jute backing**
natural, 100% bio-degradable
- 4 **Polyurethane foam backing**
18dB sound reduction

xf² SILENCIO ACOUSTIC

TECHNICAL DATA	STANDARDS	Veneto xf ² 2mm	Veneto xf ² Style Emme xf ² Style Elle xf ² Veneto xf ² B _{fl} 2.5mm**	Veneto xf ² 3.2mm	Veneto Sicuro xf ² R10 2.5mm	Silencio xf ² 3.8mm	Etrusco xf ² 2.5mm
Classification							
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41	Classes: 23 34 43
UPEC Classification	UPEC Classification	U2S P2 E1 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics							
Surface Treatment		xf ²	xf ²	xf ²	xf ²	xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.00mm	2.50mm	3.20mm	2.50mm	3.80mm	2.50mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.07mm	ca. 0.08mm	ca. 0.10mm	ca. 0.08mm	≤ 0.20mm	ca. 0.08mm
Total weight	ISO 23997 (EN 430)	ca. 2 400g/m ²	ca. 3 000g/m ²	ca. 3 900g/m ²	ca. 3 000g/m ²	ca. 3 450g/m ²	ca. 3 000g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.25mm Ø	≤ 0.30mm Ø	≤ 0.40mm Ø	≤ 0.30mm Ø	≤ 0.30mm Ø	≤ 0.30mm Ø
Technical performances							
Reaction to fire	EN 13501-1	C _{fl} s1	C _{fl} s1 (B _{fl} s1 for Veneto xf ² B _{fl})	C _{fl} s1	C _{fl} s1	C _{fl} s1	C _{fl} s1
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R10 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)					
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis					
Thermal resistance Underfloor heating	EN 12524	0.012m ² K/W Suitable	0.015m ² K/W Suitable	0.019m ² K/W Suitable	0.015m ² K/W Suitable	0.040m ² K/W Suitable	0.015m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	≤ 6dB	18dB	≤ 5dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	14dB	14dB	14dB	Not applicable	14dB
Determination of antibacterial activity	ISO 22196	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally
Colours		20	72 (Veneto) 15 (Style Emme) 11 (Style Elle) 10 (Veneto B _{fl})	20	29	112	14
Form of delivery	ISO 24341 (EN 426)	≤ 30 x 2m	≤ 30 x 2m	≤ 30 x 2m	≤ 30 x 2m	≤ 27 x 2m	≤ 30 x 2m

*Elafono: 2.0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤ 30 x 2m.

**Available on request on a selection of colours

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

Grands Classiques ♥, a selection of 20 timeless colours available until 2033 in the following options:

- 2.0 - 2.5 - 3.2mm xf²
- 2.5mm Sicuro xf² R10
- 2.5mm Essenza
- 3.8mm Silencio xf² 18dB
- multicolour welding rods

Find them on the following pages marked with ♥



Download the product offer