

LIGHT & MODERATE TRAFFIC LVT CLICK



iD ESSENTIAL CLICK

The ideal choice for new build and renovation in domestic environments

SENSORIAL BENEFITS


- Mix&match colours and designs
- Perfectly colour coordinated skirtings for a perfect finish
- Stylich accessories range

FUNCTIONAL BENEFITS

- No or little subfloor preparation required
- Click system allowing a floating installation and avoiding the use of glue
- Quick installation
- Easier and cheaper renovation as the product can be removed with no damage to the subfloor
- Acoustic reduction of 19 dB with Tarkomfort Premium underlayer

ENVIRONMENTAL BENEFITS

- Excellent indoor air quality
- No glue required
- Phthalate-free technology

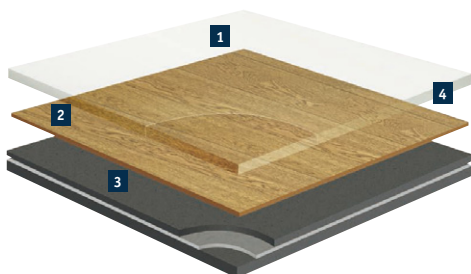

- 1** Top surface treatment
- 2** Design
printed PVC film
- 3** PVC Compact
backing and middle layers
- 4** ULTRA TOUGH TRANSPARENT
PVC wear layer

iD ESSENTIAL CLICK

TECHNICAL DATA	STANDARDS	iD Essential Click
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Compact Resilient Floorcovering
Classification	EN ISO 10874 (EN 685) commercial residential	Classes: 31 23
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	7 400g/m ²
PU treatment	—	TopClean
Abrasion group	EN 660-2	Group T : ≤ 2mm ³
Technical performances		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 3\text{dB}$ 20dB with Tarkomfort Premium underlayer
Acoustic improvement	NF S31-074	78dB (Class C - Ln,e,w < 85 db)
Residual indentation	EN ISO 24343-1 (EN 433) requirement	0.08mm
Reaction to fire	EN 13501-1	B _{f1} s1 over concrete and wood substrate
Slip resistance	DIN 51130 EN 13893	R10 (planks) / R9 (tiles) $\mu \geq 0,30$
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1081 EN 1815	> 2 kV on concrete R1 > 10 ⁹ ohms
Resistance to chemicals	EN ISO 26987 (EN 423)	High resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.03m ² K/W
Light fastness	EN ISO 105-B02	≥ 6
Form of delivery	EN ISO 24342 (EN 427)	Planks: 18.3 x 122cm Tiles : 31 x 60,3cm

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.



Play with the Room Designer

id ESSENTIAL CLICK




Limewashed Oak



Beige

24722 000



Brown


24722 001



Natural


24722 002

Delicate Oak



Light Natural


24722 003



Dark Grey

24722 004

Stone



Grey


24723 000

Rust Metal



Brown

24723 001



Black

24723 002

TECHNICAL DATA	STANDARDS	iD Essential Click
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Compact Resilient Floorcovering
Classification	EN ISO 10874 (EN 685) commercial residential	Classes: 31 23
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30mm
Total weight	EN ISO 23997 (EN 430)	7 400g/m ²
PU treatment	—	TopClean
Abrasion group	EN 660-2	Group T : ≤ 2mm ³
Technical performances		
Impact sound reduction	EN ISO 717/2	ΔLw = 3dB 20dB with Tarkomfort Premium underlayer
Acoustic improvement	NF S31-074	78dB (Class C - Ln,e,w < 85 db)
Residual indentation	EN ISO 24343-1 (EN 433) requirement	≤ 0.08mm
Reaction to fire	EN 13501-1	B _n s1 over concrete and wood substrate
Slip resistance	DIN 51130 EN 13893	R10 (planks) / R9 (tiles) μ ≥ 0,30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1081 EN 1815	> 2 kV on concrete R1 > 10 ⁹ ohms
Resistance to chemicals	EN ISO 26987 (EN 423)	High resistance
Thermal resistance Underfloor heating	EN ISO 10456	0.03m ² K/W
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

iD ESSENTIAL CLICK

Main Product Features

- Top Clean™ surface protection for resistance and easy cleaning
- Excellent indentation resistance
- Excellent acoustic performances (up to 19 dB with Tarkomfort Premium underlayer)
- Perfect colour-matched skirtings for a perfect finish

Surface Treatment




Sustainability Tag



(1) For all products produced in 2015

Logistics Information

Available in planks
or tiles



Laying direction:



General Information



Play with the Room Designer