

ACCESSORIES FOR ALL TYPES OF FLOORING

UNDERLAYERS

SOLUTION FOR WET SUBSTRATE



Tarkolay

- Quicker and more cost-effective solution that copes with up to 7% humidity rate CCM.
- Quick and easy to install and ready-to-use solution.
- Loose-lay and easy to remove solution not to damage the substrate.

Material: PVC coated glass fibre with 0.30mm thick studs

Total weight: 1,160g per m²

Total thickness: 1.3mm

Article code: 3960001 - White

Compatible with: Heterogeneous & Homogeneous vinyl (rolls)

SOLUTION FOR UNEVEN SUBSTRATE & FLOOR PRESERVATION



Tarkoflat Loose-lay

- Ready-to-use solution to reduce slight unevenness by up to 1.5mm depth.
- Ideal choice to protect floor during temporary installations.
- Quick and easy to install solution.

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm

Article code: 3568004 - Grey

Compatible with:

- LVT Click & glued, up to Class 32 (planks and tiles)
- Vinyl rolls for temporary installations (up to one month)



Tarkoflat Self-adhesive

- Ready-to-use solution to reduce slight unevenness by up to 1.5mm depth.
- Quick and easy to install solution.
- Environmentally-friendly solution (no adhesive needed).

Material: calandered PVC foil, loose-lay (naked)

Total weight: 1,500g per m²

Total thickness: 1.0mm


Article code: 3569004 - Grey

Compatible with: LVT glued (planks and tiles)

ACCESSORIES FOR ALL TYPES OF FLOORING

UNDERLAYERS

SOLUTION FOR ACOUSTIC COMFORT

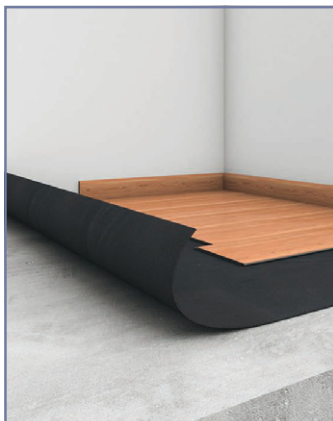

Tarkomfort Premium

- High-performance acoustic insulation: high-impact sound reduction (19 dB with iD Inspiration Click) and in-room noise reduction (up to 72 dB).
- High-performance solution to improve static indentation resistance (0.18mm with iD Inspiration Click).
- Quick and easy to install.

Material: viscoelastic polymer based on polyolefins and EVA

Total weight: 100g per m²

Total thickness: 1mm

Article code: 24992030 - Black

Compatible with: LVT Click (planks and tiles)



Elafono

- High-performance acoustic insulation: in-room noise (up to 66 dB) and impact sound (up to 14 dB) reduction with any compact linoleum.
- 90% natural.
- Superior performances in static indentation, thermal resistance and underfoot comfort.

Material: cork linoleum underlayer

Total weight: 1,450g per m²

Total thickness: 2.0mm

Article code: 1861030 - Brown

Compatible with: Linoleum (rolls)



Tarkousse

- Improved acoustic comfort in wet areas: in-room acoustic performance by up to 19dB (Granit Multisafe).
- Greater walking comfort.
- Superior durability.

Material: PVC foam

Total weight: 1,200g per m²

Total thickness: 2,0mm

Article code: 3965001 - Grey

Compatible with: Wetroom floorings

ACCESSORIES FOR ALL TYPES OF FLOORING

UNDERLAYERS & OVERLAYERS

SOLUTION FOR DAMP PROOF

Tarkodry Wall & Floor

- Watertight layer under ceramic tile (wetroom floor and wall) for a safe and long-lasting solution.
- Long-term waterproof warranty.
- Internally flexible homogeneous structure for easy installation and welding.



Tarkodry Wall

Material: homogeneous PVC underlayer

Total weight: 2,600g per m²

Total thickness: 1,5mm

Article code: 1295027 - Grey

Compatible with: ceramic tiles

Tarkodry Floor

Material: homogeneous PVC underlayer

Total weight: 2,000g per m²

Total thickness: 1,2mm


Article code: 1295028 - Grey

Compatible with: ceramic tiles

SOLUTION FOR FLOOR PROTECTION

Tarkoprotect 180 & 240

- High-performance protection and safety and perfect grip to flooring.
- Cost-effective solution by avoiding cleaning or replacement.
- Loose-lay installation to be removed easily and re-used.
- Tarkoprotect 240: absorption of up to 1L of liquid per m²

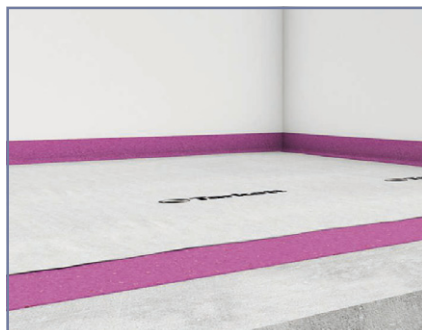

Tarkoprotect 180

Material: tackified polyester veil reinforced with PE foil

Total weight: 180g per m²

Total thickness: 1,2mm

Article code: 24990000 - White

Compatible with: all types of flooring



Tarkoprotect 240

Material: tackified polyester veil reinforced with PE foil

Total weight: 240g per m²

Total thickness: 1,2mm

Article code: 24991000 - White

Compatible with: all types of flooring