

PROFESSIONAL

Professional 10 - Oak Nature

TECHNICAL DATA	STANDARDS	Professional 10
Characteristics		
Total thickness	ISO 24346 (EN 428)	10mm
Width	-	162mm
Length	-	1245mm
Wearlayer thickness	-	app. 2.5mm
Weight	-	app. 5.5kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction fo fire	EN 13501	D _{s1}
Thermal insulation value board only		RT = 0.079m ² K/W
Thermal insulation value with ragfelt		RT = 0.099m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.079m ² K/W
Underfloor heating compatible*		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance**		
Abrasion penetration Protoco Lacq.	prEN 13696	> 4000 revs
Abrasion penetration Protoco Nat.	prEN 13696	> 3500 revs
Abrasive wear	-	3.5mg/100 revs


* Not suitable for Basket Weave or the woodspecies beech and maple, except in Viva.

** Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

162 x 1245mm

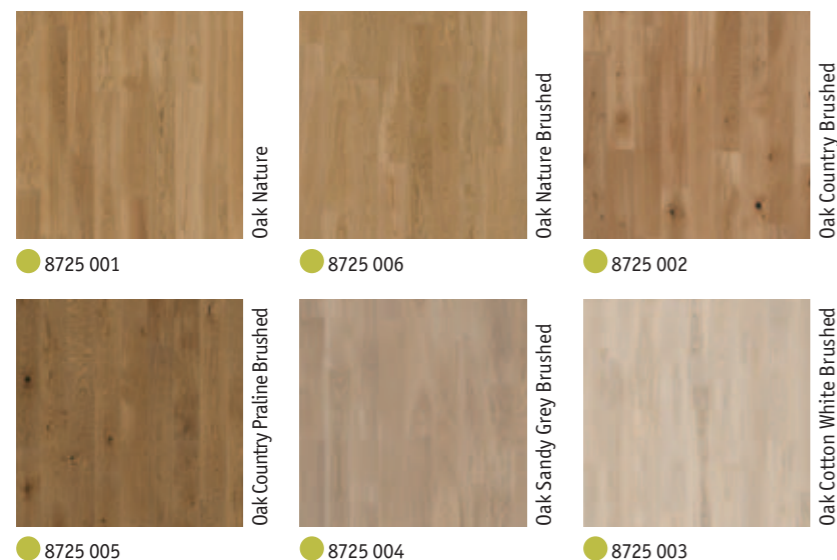

PROFESSIONAL 10mm

Main Product Features

- Made for renovation areas
- Recommended for glued down applications
- 2.5mm wear-layer (can be re-sanded 2-3 times)


Surface Treatment



Logistics Information



Sustainability Tag



General Information



Professional 22 - Ash Nature

TECHNICAL DATA	STANDARDS	Professional 22
Characteristics		
Total thickness	ISO 24346 (EN 428)	22mm
Width	-	190mm
Length	-	2535mm
Wearlayer thickness	-	app. 3.5mm
Weight	-	app. 14.8kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17\text{dB}$ with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction fo fire	EN 13501	D _{s1}
Thermal insulation value board only		RT = 0.152m ² K/W
Thermal insulation value with ragfelt		RT = 0.182m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.192m ² K/W
Underfloor heating compatible*		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance**		
Abrasion penetration Protoco Lacq.	prEN 13696	> 4000 revs
Abrasion penetration Protoco Nat.	prEN 13696	> 3500 revs
Abrasive wear	-	3.5mg/100 revs


* Not suitable for Basket Weave or the woodspecies beech and maple, except in Viva.

** Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

190 x 2535mm

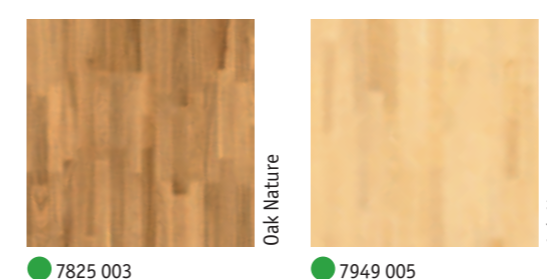

PROFESSIONAL 22mm

Main Product Features

- For nail down installation on joists
- Wear layer thickness approx. 3.5mm (can be re-sanded 3-4 times)


Surface Treatment



Logistics Information



Sustainability Tag



General Information



Play with the Room Designer